


BEAM CLAMP Model: BC

Capacity: 1000 - 10000 kg

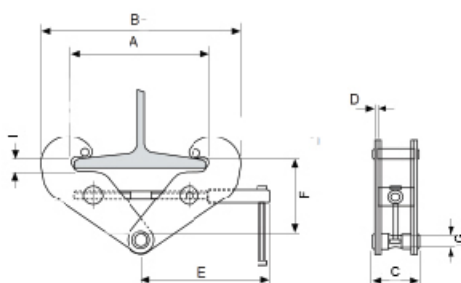

Features

- Provides a quick and versatile rigging point for hoisting equipment, pulley blocks or loads. Flexible application due to wide adjustment range. The central threaded spindle allows easy attachment and a safe and secure grip. The spindle can be secured against loosening.

Option

- Can be supplied with shackle.
- Small dimensions for applications at beams with a low base height.



Technical Parameters

Item Code	Capacity (kg)	Flange width (mm)	Dimensions(mm)												Net weight (Kg)	
			A		B		C	D	E	F		G	H	I		
			Max.	Min.	Max.	Max.				Min.	Min.			Max.		Min.
212010	1000	75-230	246	186	350	84	4	215	150	115	44	20	14	21	3.8	
212020	2000	75-230	246	186	350	94	6	215	150	115	44	20	14	21	4.6	
212030	3000	80-320	320	232	455	122	8	255	225	180	75	22	30	34	9.2	
212050	5000	90-310	310	242	445	129	10	255	225	180	75	28	30	34	11	
212100	10000	90-320	320	268	480	146	12	275	220	175	66	38	34	35	17.2	
213010	1000	75-230	246	186	350	84	4	215	150	115	44	20	14	21	4.1	
213020	2000	75-230	246	186	350	94	6	215	150	115	44	20	14	21	5	
213030	3000	80-320	320	232	455	122	8	255	225	180	75	22	30	34	10.4	
213050	5000	90-310	310	242	445	129	10	255	225	180	75	28	30	34	12	
213100	10000	90-320	320	268	480	146	12	275	220	175	66	38	34	35	16	

Note: Item No. 213### is coupled with shackle