


CABLE PULLER Model: TA / TS

Capacity: Pulling force 800 - 5400 kg




Features

- It has a light weight, compact, high strength aluminium alloy housing (TS model is stamped steel housing), with a large flat bottom surface for increased stability in horizontal as well as vertical working position.
- Forward and reversing levers in tandem provide slim design and assure power transfer along the centre line.
- Overload protection is by a shearing pin in the forward lever. Spare shear pins are conveniently located in the carrying handle or operating lever.
- A broken pin can be replaced without removing the load.
- A lever disengages the rope clamp system allowing easy, smooth installation of the wire rope.
- The rope is tapered at one end for easy threading and fitted with an eye sling hook with safety latch on the other end.
- The parallel arrangement of the clamping system protects the wire rope by distributing the clamping forces evenly.
- A long rope advance per each lever stroke increases the working speed.

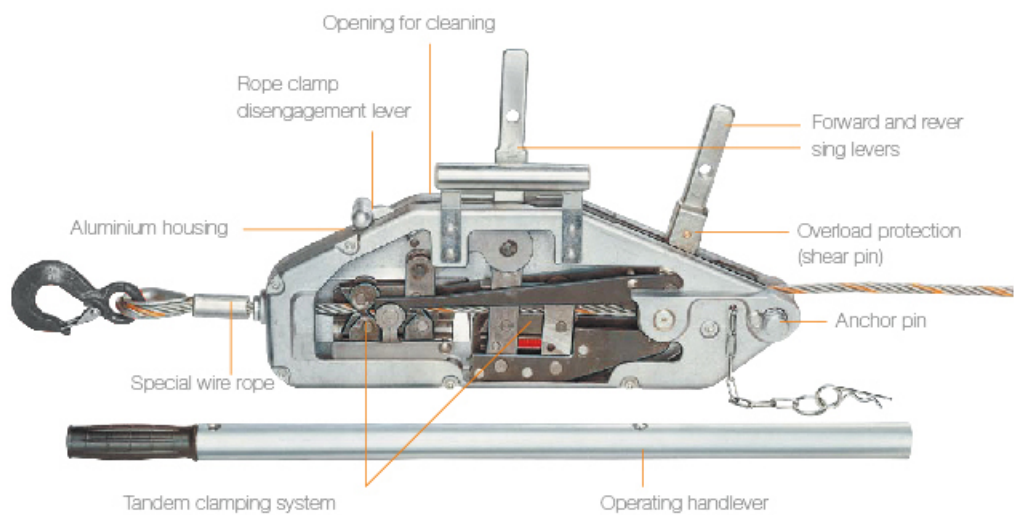

CABLE PULLER Model: TA / TS

Capacity: Pulling force 800 - 5400 kg

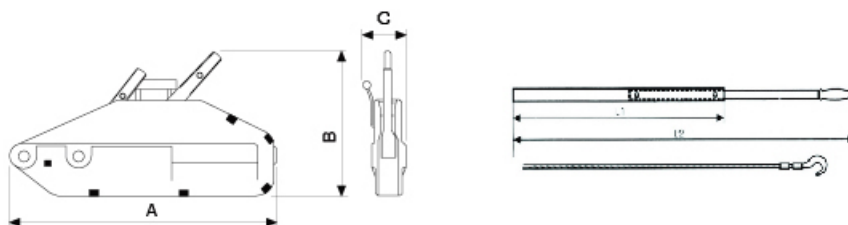

Technical Parameters

Item Code	Model	Capacity (kg)	Lever pull at WLL (N)	Rope advance per double (mm)	Rope dia. (mm)	Max. travelling load (kg)	Net weight kg
216008	TA08	800	343	≥ 52	8.3	1200	6.5
216016	TA16	1600	441	≥ 55	11	2400	12.5
216032	TA32	3200	441	≥ 28	16	4000	28
216054	TA54	5400	745	≥ 30	20	8000	56.5
217008	TS08	800	343	≥ 52	8.3	1200	8
217016	TS16	1600	441	≥ 55	11	2400	14
217032	TS32	3200	441	≥ 28	16	4000	28



Size Specification (mm)

Item Code	Model	Max. overall size				
		A	B	C	L1	L2
216008	TA08	426	235	64	800	/
216016	TA16	545	280	97	692	1200
216032	TA32	660	325	116	692	1200
216054	TA54	930	480	152	680	1120
217008	TS08	426	235	64	800	/
217016	TS16	545	280	97	692	1200
217032	TS32	660	325	116	692	1200