


HAND PULLEYBLOCK Model: HPB

Capacity: 0.5 -6.4 ton

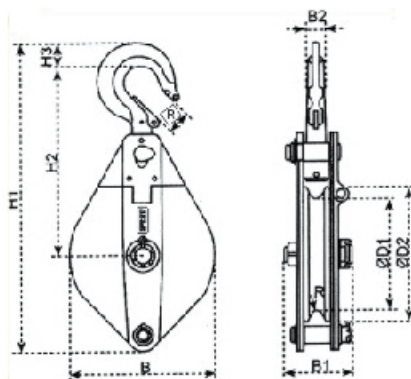

Features

- Swinging the hook in the direction of pull securely locks the pulley block.
- The high quality cast steel sheaves have machined grooves.
- When choosing and classifying pulley blocks, take the Principles for Rope Drives DIN 15020 into consideration.



Technical Parameters

Item Code	Model	Working Load (T)	Hook latch H (mm)	Rope Dia. (mm)	B	B1	B2	H1	H2	H3	D1	D2	D3	Weight (kg)
221006	HPB 05	0.5	20	Φ5	95	62	18	260	190	20	75	88	3	2
221010	HPB 10	1	23	Φ7	118	78	17	306	200	23	85	106	4	3.2
221020	HPB 20	2	27	Φ13	119	92	24	425	263	30	150	190	7	7.3
221032	HPB 32	3.2	31	Φ15	230	108	28	496	295	40	180	220	9	13.1
221064	HPB 64	6.4	42	Φ15	270	118	35	655	375	47	210	260	10	22.1



Pulley blocks, hinged, with single steel sheave

Capacity 500 - 6400 kg

One side of the pulley blocks is hinged and can be opened for easy and quick positioning of the wire rope on the sheave. It can also provide a quick and versatile rigging point or redirect a wire rope.



Angle Factor Multipliers

Angle	Factor	Angle	Factor
0°	2.00	100°	1.29
10°	1.99	110°	1.15
20°	1.97	120°	1.00
30°	1.93	130°	0.84
40°	1.87	145°	0.76
45°	1.84	140°	0.68
50°	1.81	150°	0.52
60°	1.73	160°	0.35
70°	1.64	170°	0.17
80°	1.53	180°	0.00
90°	1.41	/	/



ROLLER SKATES

Capacity: 6--18ton

Shifting skate can be used wherever heavy objects have to be moved. The load can be lifted using either the roller crowbar or a jack, allowing the skates to be easily positioned

Item Code. 222### skate Turnable with bearing

Item Code. 223### is heavy duty type.



Technical Parameters

Item Code	Capacity (T)	N.W. (Kg)
222006	6	13.95
222008	8	20.8
222012	12	27.1
222018	18	42.45
223006	6	12.8
223008	8	20.2
223012	12	26.1
223018	18	39.4