

PW-CDSD10/15/20



Semi-electric Stacker Series

半电动堆垛车系列

- 整车设计合理，结构紧凑，美观实用。
 - 采用高品质液压泵站，动力强劲，配置大容量牵引电池，持久耐用。
 - 采用优质碳素钢轧制的“C”型成型钢门架是安全的保障。
 - 金属表面采用烤漆处理，外壳体采用塑料注塑成型，经久耐用，永不生锈。
- The stacker has a reasonable design and compact structure, good looking and practical.
 - It adopts quality hydraulic pump station, strong power, match large capacity of traction battery, durable in use.
 - C type forming steel door frame which is made of high quality carbon steel is biggest security.
 - Outer metal surface take paint treatment, the cover is made through plastic injection, durable.



- 省时
Save time
- 省力
Labor saving
- 生产更高效
Production more efficient

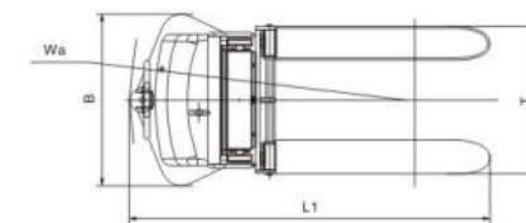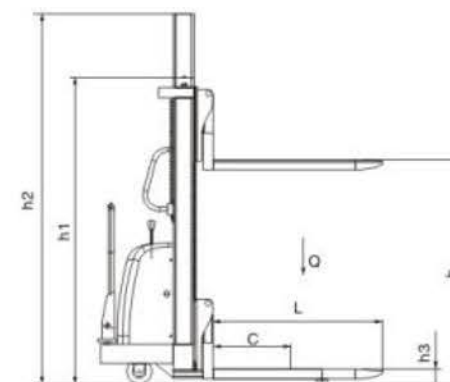

主要技术数据 Main technical data

项目/型号 Articles/model	单位 unit	PW-CDSD10	PW-CDSD15	PW-CDSD20
额定载荷Q Rated load	kg	1000	1500	2000
载荷中心距C Load center distance	mm	500		
提升高度h Lifting height	mm	1600/2000/2500/3000		
门架缩回时高度h1 Doorframe retract height	mm	2068/1568/1818/2068		
作业时门架最大高度h2 Doorframe max. Working height	mm	2068/2568/3068/3568		
货叉最低高度h3 Fork lowest height	mm	86		
货叉长度L Fork length	mm	910 (1150)		
车体长底L1 Overall length	mm	1585		
货叉可调宽度T Fork adjustable width	mm	285/1000		
车体宽度B Overall width	mm	1045		
转弯半径Wa Turning radius	mm	1480		
提升速度，空载/满载 Lifting speed, no-load/full load	mm/s	120/100		
下降速度，空载/满载 Lowering speed, no-load/full load	mm/s	130/150		
提升电机 Lifting motor	V/Kw	12/1.6		
蓄电池 Battery	V/Ah	12/120		
充电器 Charger	V/A	12/15		
净重/毛重 NW/GW	Kg	332/348 414/430	386/402 420/436	358/374 431/447 / 413/429 443/459
			382/398 442/458	434/450 450/466